

Sound absorption coefficient according to UNE-EN ISO 354, UNE-EN ISO 11654, ASTM C 423

Product ref. : MÅLNING
Date : 23.07.2018

Description of the acoustic element :



Material : BTECT-W (melamine resin)
Thickness [mm] : 40
Notes : -

Format [mm] : 600 x 600
Color : Custom - BCN_A

Evaluation : Reverberation time
Other values obtained by engineering method

Frequency [Hz]	Absorption coeff. α_s	Equiv. Area A
100	0,13	1,31
125	0,16	1,61
160	0,23	2,32
200	0,32	3,23
250	0,44	4,44
315	0,53	5,34
400	0,65	6,55
500	0,78	7,86
630	0,83	8,37
800	0,87	8,77
1.000	0,93	9,37
1.250	0,99	9,98
1.600	0,98	9,88
2.000	1,00	10,08
2.500	0,99	9,98
3.150	1,02	10,28
4.000	0,99	9,98
5.000	1,06	10,68

NRC	0,80
SAA	0,78
α_w	0,75(H)
Sound Absorption Class accord. to UNE-EN ISO 11654	C
Surface [m ²]	10,08
Installation method	E000
Density [kg/m ³] accord. to ISO 845	9 (+2/-1)
Fire behaviour accord. to DIN 4102	B1
Fire behaviour accord. to EN ISO 13501	C - s2, d0

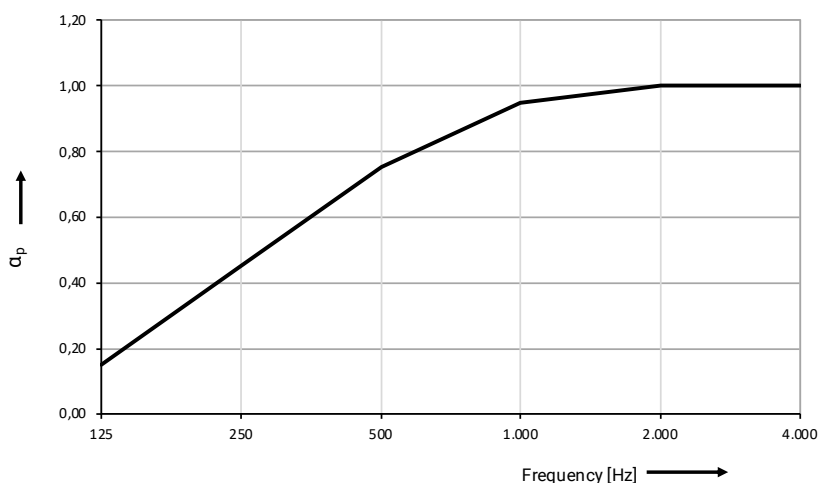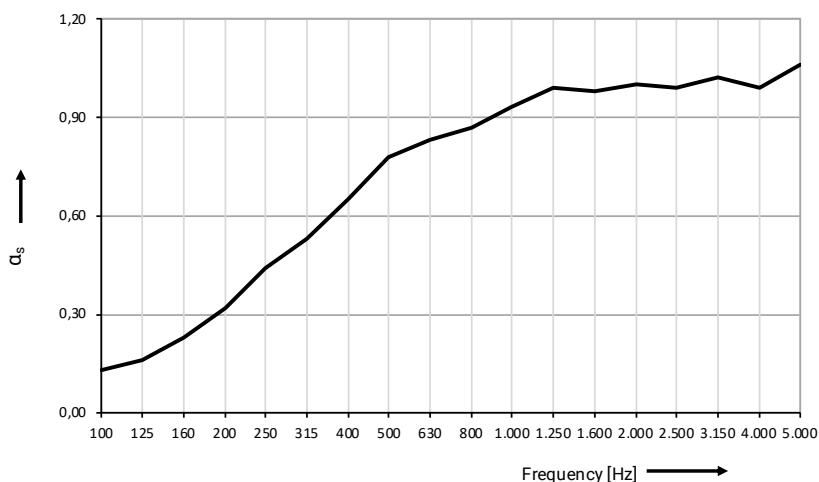

Practical Sound absorption coefficient α_p according to UNE-EN ISO 11654

Freq. [Hz]	125	250	500	1.000	2.000	4.000
α_p	0,15	0,45	0,75	0,95	1,00	1,00